

Technical Specification

REF: PAU1

ISS: 2

Key Features

- No False Bulb Failure Warnings
- Compensates for the Low Power Consumption of LED's
- Does not interfere with Failure Detection Systems

Technical Specification

Functions: LED Loading

Homologation: N/A

Voltage: 24V

Power Consumption: Stop 21W

Tail 21W

D.I 21W

Rear Fog 21W

Reverse 21W

Connection : 500mm

Fixing : 2 x M5 screw/bolt

IP Rating : IP67

Material : Base - Aluminium | Housing - ABS

Temperature Range : -40°C to +40 °C

Part Numbers

LU101S01-4-9-AA 5 Function Intelligent Load Device 24V

LU104SZZ-4-9-AA 5 Function Intelligent Load Device 12V

See Also

F698 Single Function Intelligent Load Device 24V

IBA1102 Single Function Intelligent Load Device 12V

LED Ballast Load




Overview

LED lighting is a popular alternative to bulb products, however their low power consumption can cause problems, showing bulb failure where there is none.

The Perei Intelligent LED Loading Module resolves these false failure warnings by drawing additional power through the system. It also allows failure detection systems to operate as normal.

Drawing

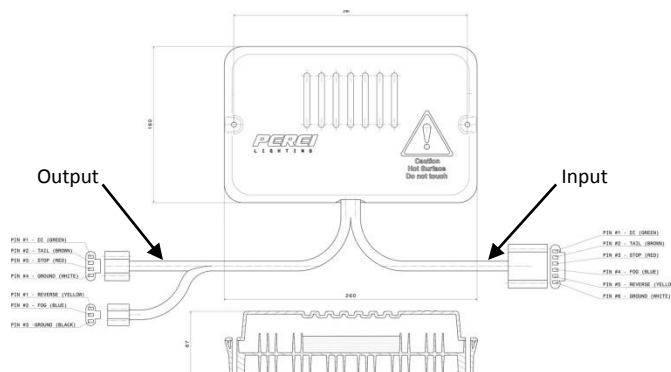

www.perei.co.uk | sales@perei.co.uk | +44 (0) 1842 812290

Perei Group Limited | 36 Wimbledon Avenue | Brandon | Suffolk | IP27 0NZ | United Kingdom

Specifications herein are subject to change without notice

