

# Technical Specification

REF: PAU1

ISS: 2

## Key Features

- No False Bulb Failure Warnings
- Compensates for the Low Power Consumption of LED's
- Does not interfere with Failure Detection Systems

## Technical Specification

**Functions:** LED Loading

**Homologation:** N/A

**Voltage:** 24V

**Power in:** 0.58A - 0.85A

**Power Out:** 85mA – 350mA TO LED

**Power Consumption:** 21W

**Connection :** 250mm

**Fixing :** N/A

**IP Rating :** IP67

**Material :** Housing - Aluminium

**Temperature Range :** -40°C to +40 °C

## Part Numbers

F698

Single Function 21W LED Loading Module

## See Also

IBA1102

Single Function Intelligent Load Device 12V

LU101S01-4-9-AA

5 Function Intelligent Load Device 24V

LU104SZ-4-9-AA

5 Function Intelligent Load Device 12V

## LED Ballast Load




## Overview

LED lighting is a popular alternative to bulb products, however their low power consumption can cause problems, showing bulb failure where there is none.

The Perei Intelligent LED Loading Module resolves these false failure warnings by drawing additional power through the system. It also allows failure detection systems to operate as normal.

## Drawing

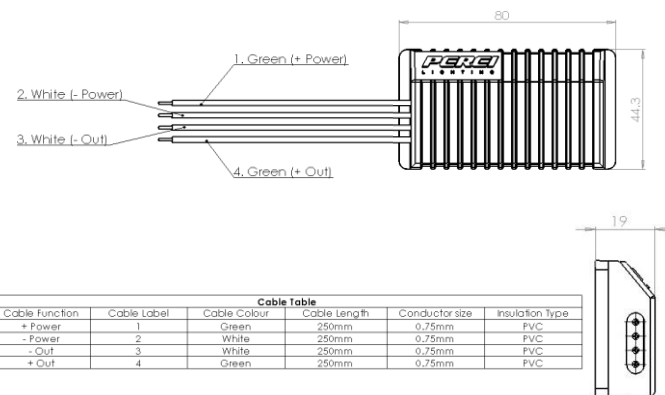

www.perei.co.uk | sales@perei.co.uk | +44 (0) 1842 812290

Perei Group Limited | 36 Wimbledon Avenue | Brandon | Suffolk | IP27 0NZ | United Kingdom

Specifications herein are subject to change without notice

