

Technical Specification

DATA REF: PC6

ISS: 1

Key Features

- 'Signature' Tail Feature
- ECE Approval
- Compact Design
- Simple Vehicle Installation
- Option for SuperSeal Connection

Technical Specification

Functions: Stop | Tail | Indicator | Fog | Reverse

Homologation: ECE

Voltage: 12v | 24v

Power Consumption: Stop (12v) 1.6w, (24v) 1.4w
Tail (12v) 0.51w, (24v) 0.5w
D.I (12v) 1.4w, (24v) 1.1w

Connection : Cable 450mm

Fixing : M6 Bolt

IP Rating : IP67 Hermetically Sealed

Material : Lens PMMA | Housing PC/ABS

Temperature Range : -40°C to +50 °C

Part Numbers

CR302SZZ-2-2-AA 100mm Square LED stop/tail/DI 12V
CR302SZZ-4-2-AA 100mm Square LED stop/tail/DI 24V

See Also


CRL302 Stop/Tail/Indicator



Overview

CRL302 Series with Signature tail feature. The simple to install compact design comes in 12v or 24v with an additional SuperSeal fitting option.

Drawing

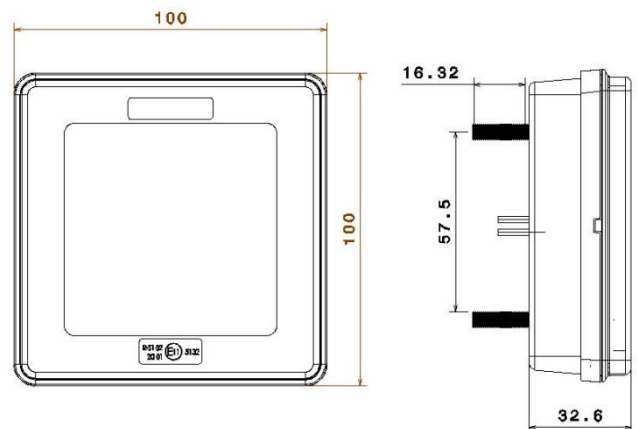

www.perei.co.uk | sales@perei.co.uk | +44 (0) 1842 812290

Perei Group Limited | Keystone Innovation Centre | Thetford | Norfolk | IP24 1JD | United Kingdom

Specifications herein are subject to change without notice

