Technical Specification

REF: PDRL1

ISS: 1

Key Features

- 5 Module DRL + Position Assembly
- Creates Signature Appearances
- 10 30 Volt Operation
- LED Long Life Reliability
- Modular Design (Plug and Play)

Technical Specification

Functions: DRL | Position Homologation: ECE **Voltage:** 10 – 30 V

Power Consumption: DRL 12V – 320mA 24V - 160mA

POS 12V - 40mA 24V - 30mA

Connection: Cable

Fixing:

IP Rating: IP67 Hermetically Sealed

Material: Housing – Aluminium

Temperature Range: -40°C to +50°C

Part Numbers

DL104SZZ-5-2-AA Modular DRL/Front Position 9-33V

See Also

DL104 Daytime Running Lamp (DRL) & POS






Overview

Universal Design 5 Module Daytime Running / Position Lamp for creating Signature Vehicle Appearances compliant with ECE Homologation.

A 2 stage Optical System gives an Ultra High Output for DRL and a reduced output compliant with ECE Position Lamp requirements. A Separate Electrical Driver provides Plug and Play Installation. Sold in Pairs

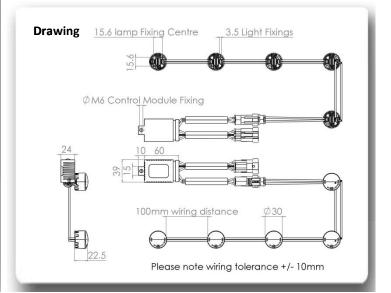

www.perei.co.uk | sales@perei.co.uk | +44 (0) 1842 812290

