

# Technical Specification

REF: PF5

ISS: 1

## Key Features

- ADR Approval for use in Australia
- 12 or 24 volt operation
- Full Range of ECE Functions
- Popular Design for PSV Markets
- Flush or Base Mount

## Technical Specification

**Functions:** Fog

**Homologation:** ECE

**Voltage:** 12v | 24v

**Power Consumption:** 3.24 (12v)  
4.32 (24v)

**Connection:** 6.3mm Tab

**Fixing:** M6 Bolt

**IP Rating:** IP67

**Material:** Lens – Polycarbonate | Housing – Polycarbonate

**Temperature Range:** -40°C to +50°C

## Part Numbers

RF1200LED12v – LED Rear Fog 12 volt

RF1200LED24v – LED Rear Fog 24 volt

## See Also

1200 Series Stop/Tail | Reverse | Repeater | D.I

## 1200 Series Fog Lamp




### Overview

1200 Series available as: Stop/Tail (combined or individual lamps), Side Repeater, Reverse, Rear Fog.

Flush mounted or supplied with base the 12000 Series is a popular design for PSV markets with ADR approval for use in Australia.

### Drawing

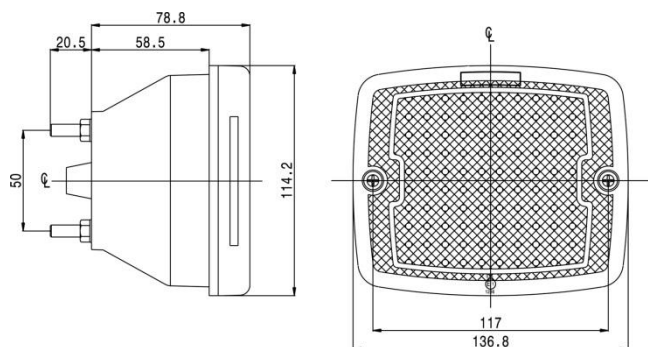

[www.perei.co.uk](http://www.perei.co.uk) | [sales@perei.co.uk](mailto:sales@perei.co.uk) | +44 (0) 1842 812290

Perei Group Limited | Keystone Innovation Centre | Thetford | Norfolk | IP24 1JD | United Kingdom

Specifications herein are subject to change without notice

**PEREI**