

# Technical Specification

REF: PF7

ISS: 1

## Key Features

- Popular 122mm size
- 12, 24, or 9-33 volt options
- LED Long Life Reliability
- ECE approval for all functions
- Low current Draw

## Technical Specification

**Functions:** Fog

**Homologation:** ECE

**Voltage:** 12v | 24v | Varivolt (9-33v)

**Power Consumption :** Fog (12v) 3.24, (24v) 4.56w

**Connection :** Cable 200mm

**Fixing :** M6 Bolt

**IP Rating :** IP67 rated sealing

**Material :** Lens – PMMA | Housing - ABS

**Temperature Range :** -40°C to +85°C

## Part Numbers

RF700LED12V-Rear fog LED 12V

RF700LED24V-Rear fog LED 24V

RF700LEDVV-Rear fog LED 9-33V

## See Also

CRL777 3 way housing, Combination, Reverse, Fog/Reverse

## 700 Series LED Fog Lamp




### Overview

New technology LED combination lamp series using a common lens style for all functions.

Suitable for high temperature applications and use in 3 way housing the series consists of ; CRL700 Stop/Tail/D.I, RF700 Rear Fog, RV700 Reverse, RFRV700 Combination Fog/Reverse, and RR700 Reflex Reflector.

### Drawing

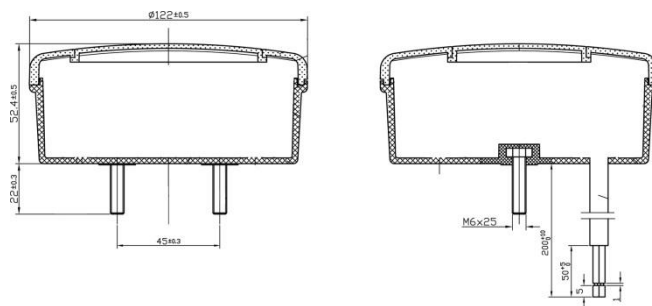

www.perei.co.uk | sales@perei.co.uk | +44 (0) 1842 812290

Perei Group Limited | Keystone Innovation Centre | Thetford | Norfolk | IP24 1JD | United Kingdom

Specifications herein are subject to change without notice

