

# Technical Specification

REF: PFR5

ISS: 1

## Key Features

- Popular 122mm size
- 12, 24, or 9-33 volt options
- LED Long Life Reliability
- ECE approval for all functions
- Low current Draw

## Technical Specification

**Functions:** Fog | Reverse

**Homologation:** ECE

**Voltage:** 12v | 24v | Varivolt (9-33v)

**Power Consumption:** Reverse (12v) 3.24w, (24v) 2.64w  
Fog (12v) 3.24, (24v) 4.56w

**Connection:** Cable 200mm

**Fixing:** M6 Bolt

**IP Rating:** IP67 rated sealing

**Material:** Lens – PMMA | Housing – ABS

**Temperature Range:** -40°C to +85°C

## Part Numbers

RFRV700LED12V-Fog/Reverse LED 12V

RFRV700LED24V-Fog/Reverse LED 24V

RFRV700LEDVV-Fog/Reverse LED 9-33V

## See Also

CRL777 3 way housing, Rear Fog, Combination, Reverse,  
Fog/Reverse

## 700 Series LED Fog/Reverse Lamp




## Overview

New technology LED combination lamp series using a common lens style for all functions.

Suitable for high temperature applications and use in 3 way housing the series consists of ; CRL700 Stop/Tail/D.I, RF700 Rear Fog, RV700 Reverse, RFRV700 Combination Fog/Reverse, and RR700 Reflex Reflector.

## Drawing

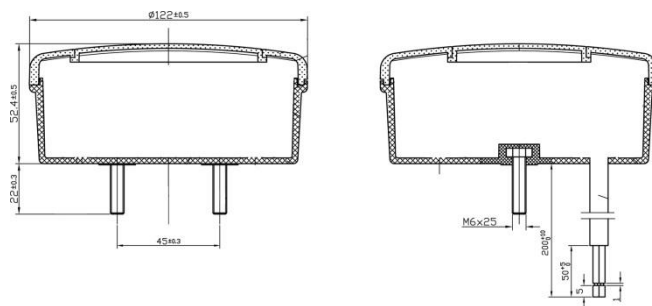

www.perei.co.uk | sales@perei.co.uk | +44 (0) 1842 812290

Perei Group Limited | Keystone Innovation Centre | Thetford | Norfolk | IP24 1JD | United Kingdom

Specifications herein are subject to change without notice

**PEREI**