

Technical Specification

REF: PML8

ISS: 1

Key Features

- Slim-line Linear Design
- 10 - 30 Volt Operation
- Long Life LED Light Reliability
- "Snap In" Lamp to Bezel – Easy Fit
- Improved Vehicle Visibility

Technical Specification

Functions: Front Position | Front Indicator

Homologation: ECE

Voltage: 10 - 30 Volt

Power Consumption: Front Position 0.3W
Front Indicator 2.6W

Connection: Cable 500mm

Fixing: M4 Bolts

IP Rating: IP67 Hermetically Sealed

Material: Lens – PMMA | Housing – Polycarbonate / ABS

Temperature Range: -40°C to +50°C

Part Numbers

PL.105.S.17 10 - 30 Volt Front Position / Indicator

See Also

105 Series Stop | Rear Position | Indicator Module

105 Series Fog | Reverse | Rear Position Module

105 Series Rear Position | Rear Indicator Module

105 Series – Front Position Marker / Indicator




Overview

Slim-line LED Lamps providing multiple fitting options for LED signal lighting in a clever package design.

The 2 Part Construction provides a simple installation and ensures easy replacement whilst in service. No tools are required to replace the lamp unit.

Drawing

Insulation Colour	Function/ Signal
Brown	Front Position
Green	DI
White	Ground

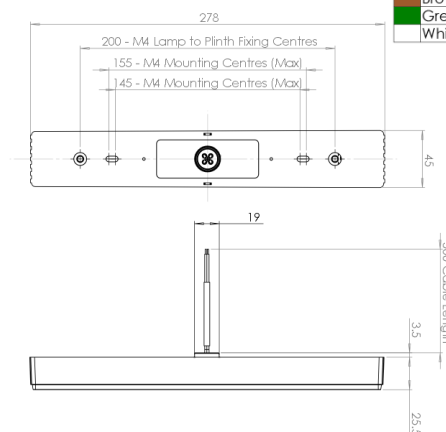

www.perei.co.uk | sales@perei.co.uk | +44 (0) 1842 812290

Perei Group Limited | 36 Wimbledon Avenue | Brandon | Suffolk | IP27 0NZ | United Kingdom

Specifications herein are subject to change without notice

PEREI