

Technical Specification

REF: PML9

ISS: 1

Key Features

- LED Side, Front & Rear Marker Combination
- Robust EPDM Rubber Mounting
- 10 – 30 Volt DC with Low Power Consumption
- High Impact Materials
- ECE Homologation
- Vertical & Horizontal Mounting Options Available
- IP67 Hermetically Sealed

Technical Specification

Functions: LED Interior Light

Homologation: ECE

Voltage: 10 – 30 Volts

Power Consumption: 0.7w

Connection: Cable 300mm

Fixing: M3 Bolt

IP Rating: IP67 Hermetically Sealed

Material: Lens – PC | Housing – EPDM

Temperature Range: -30°C to +50°C

Part Numbers

PL.295.S.09	LH	Front / Rear Horizontal
PL.295.S.10	RH	Front / Rear Horizontal
PL.295.S.11	LH	Front / Rear / Side Horizontal
PL.295.S.12	RH	Front / Rear / Side Horizontal
PL.295.S.13	LH	Front / Rear Vertical
PL.295.S.14	RH	Front / Rear Vertical
PL.295.S.15	LH	Front / Rear / Side Vertical
PL.295.S.16	RH	Front / Rear / Side Vertical

See Also

295 Series – Combination Stalk Marker Lamp




Overview

Robust LED Combination Marker Lamp with Options for Horizontal or Vertical Mounting. An EPDM material is utilised for the Rubber Stalk being both flexible, durable and resistant to damaging UV.

Option also available for Front /Rear Position combination only (excluding side marker) in both horizontal and vertical positions.

Drawing

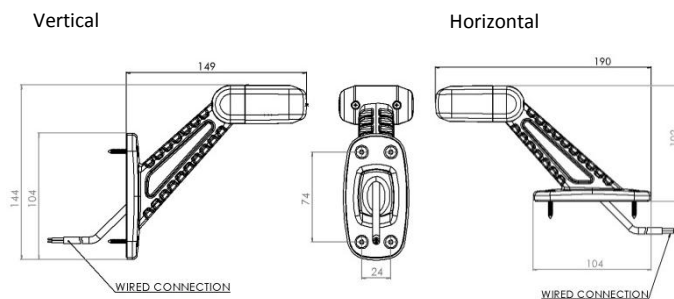

www.perei.co.uk | sales@perei.co.uk | +44 (0) 1842 812290

Perei Group Limited | Keystone Innovation Centre | Thetford | Norfolk | IP24 1JD | United Kingdom

Specifications herein are subject to change without notice

PEREI