

Technical Specification

REF: PSR3

ISS: 1

Key Features

- ADR Approval for use in Australia
- 12 or 24 volt operation
- Full Range of ECE Functions
- Popular Design for PSV Markets
- Flush or Base Mount

Technical Specification

Functions: Side Repeater

Homologation: ECE

Voltage: 12V | 24V

Power Consumption: 3.24 W (12V)
4.32 W (24V)

Connection: Cable 150mm

Fixing: M6 Bolt

IP Rating: IP67

Material: Lens – Polycarbonate | Housing – Polycarbonate

Temperature Range: -40°C to +50°C

Part Numbers

SR1200LED12v – LED Side Repeater 12 volt

SR1200LED24v – LED Side Repeater 24 volt

See Also

1200 Series Fog | Reverse | Stop/Tail | D.I

1200 Series Side Repeater




Overview

1200 Series available as: Stop/Tail (combined or individual lamps), Side Repeater, Reverse, Rear Fog.

Flush mounted or supplied with base the 12000 Series is a popular design for PSV markets with ADR approval for use in Australia.

Drawing

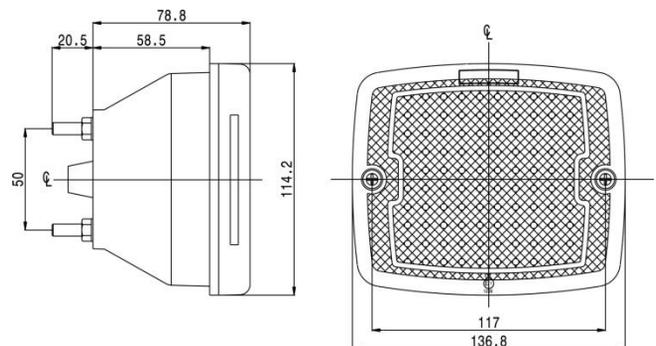

www.perei.co.uk | sales@perei.co.uk | +44 (0) 1842 812290

Perei Group Limited | Keystone Innovation Centre | Thetford | Norfolk | IP24 1JD | United Kingdom

Specifications herein are subject to change without notice

PEREI