

Technical Specification

REF: PST6

ISS: 1

Key Features

- ADR Approval for use in Australia
- 12 or 24 volt operation
- Full Range of ECE Functions
- Popular Design for PSV Markets
- Flush or Base Mount

Technical Specification

Functions: Stop/Tail

Homologation: ECE

Voltage: 12v | 24v

Power Consumption: 3.24 (12v)

4.32 (24v)

Connection: 6.3mm Tab

Fixing: M6 Bolt

IP Rating: IP67

Material: Lens – Polycarbonate | Housing – Polycarbonate

Temperature Range: -40°C to +50°C

Part Numbers

SL1200LED12v – LED Stop/Tail 12 volt

SL1200LED24v – LED Stop/Tail 24 volt

See Also

1200 Series Fog | Reverse | Repeater | D.I

1200 Series Stop/Tail




Overview

1200 Series available as: Stop/Tail (combined or individual lamps), Side Repeater, Reverse, Rear Fog.

Flush mounted or supplied with base the 12000 Series is a popular design for PSV markets with ADR approval for use in Australia.

Drawing

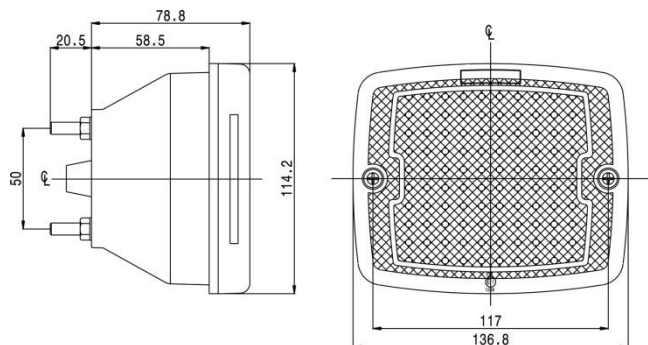

www.perei.co.uk | sales@perei.co.uk | +44 (0) 1842 812290

Perei Group Limited | Keystone Innovation Centre | Thetford | Norfolk | IP24 1JD | United Kingdom

Specifications herein are subject to change without notice

