

Technical Specification

REF: PWB2

ISS: 1

Key Features

- Ultra LED High Power 100cd Output
- Multiple Flash Patterns
- 10 – 30 Volt Operation
- Mag Mount & Bolt Fix Options
- Low Power Consumption

Technical Specification

Functions: Amber Warning with 360 Degree Illumination

Homologation: REG 10

Voltage: 10 – 30 Volts

Power Consumption : 8w

Connection : 500mm Cable / Auxiliary Plug + 500mm Cable

Fixing : Magnetic or Bolt Mount

IP Rating : IP65 Hermetically Sealed

Material : Lens – PC / Housing - PC

Temperature Range : -30°C to +65°C

Part Numbers

PL.135.S.02 LED Mini Beacon 10 – 30 Volt Mag Mount + Cable + Plug

PL.135.S.03 LED Mini Beacon 10 – 30 Volt Bolt Mount

NOTE: Option of Clear Lens by request

See Also

PL.345.S.02 Mini Beacon LED 10 -30 Volt Mag Mount + Cable + Plug

PL.345.S.03 Mini Beacon LED 10-30 Volt Bolt Mount + Cable

135 Series - LED High Power Beacon




Overview

Ultra Bright LED Warning Light with 360 Degree Visibility for Warning & Safety applications. Utilising a High Output 100 cd Optical System with Low Power Consumption, LED Beacons offer many benefits over conventional Halogen Beacons.

Magnetic or 3 Bolt Fixing options available.

Drawing

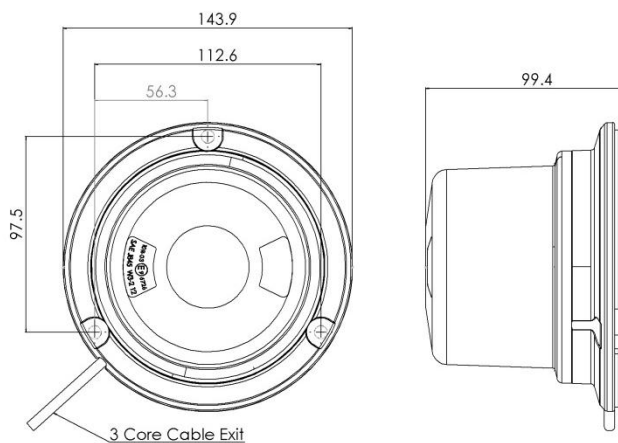

www.perei.co.uk | sales@perei.co.uk | +44 (0) 1842 812290

Perei Group Limited | Keystone Innovation Centre | Thetford | Norfolk | IP24 1JD | United Kingdom

Specifications herein are subject to change without notice

